

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 406 962 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90201752.4

(51) Int. Cl.⁵: H03H 9/54

(22) Date of filing: 02.07.90

(30) Priority: 07.07.89 AU 5119/89

(43) Date of publication of application:
09.01.91 Bulletin 91/02

(84) Designated Contracting States:
DE FR GB IT SE

(71) Applicant: N.V. Philips' Gloeilampenfabrieken
Groenewoudseweg 1
NL-5621 BA Eindhoven(NL)

(72) Inventor: Hales, Jeff
c/o INT. OCTROOIBUREAU B.V., Prof.
Holstlaan 6
NL-5656 AA Eindhoven(NL)

(74) Representative: De Jongh, Cornelis
Dominicus et al
INTERNATIONAAL OCTROOIBUREAU B.V.
Prof. Holstlaan 6
NL-5656 AA Eindhoven(NL)

(54) A filter.

(57) A filter for use in radio apparatus, the filter comprising a plurality of isolated ceramic resonators each having an input and a plurality of variable capacitance means for electronically tuning respective ceramic resonators and that the inputs of adjacent ceramic resonators are coupled via a first coupling path and also via a second coupling path, the first coupling path being composed of a fixed capacitance network and the second coupling path being composed of a cascade arrangement of a first said variable capacitance means and a second said variable capacitance means, the relative values of the capacitances forming the first and second coupling paths being such that the overall coupling between the resonators remains substantially constant during the electronic tuning of the resonators by the variable capacitance means.

EP 0 406 962 A2

The present invention relates to a filter for use in radio apparatus, the filter comprising a plurality of resonators and plurality of variable capacitance means for electronically tuning respective resonators. The invention also relates to a radio apparatus comprising such a filter.

Such a filter is known and is used in the front end of the Philips FM1000 mobile radio receiver. This filter comprises a plurality of resonators or the parallel LC type wherein the coupling between adjacent resonators is achieved by capacitive circuit elements rather than by electromagnetic coupling between the resonators themselves. These resonators have a high impedance and the capacitance of the variable capacitance means need only be a relatively small value to tune the resonators which does not seriously affect the performance of this filter. However these resonators have the disadvantage of being large and do not lend themselves to mass production. Furthermore the resonators in this filter have the further disadvantage of requiring shields and also requiring an isolated board for the high voltage end of the resonators.

Front end filters are of two general types, namely broad band fixed frequency filters and narrow band tunable filters which can be mechanically or electronically tuned the latter of which the FM1000 front end filter is an example. These narrow band tunable filters are more suitable for use in areas where there are a large number of transmitters and receivers and interference is a problem. In recent years it has been known to use bonded pairs or triplets of ceramic resonators in broad band fixed frequency filters where the coupling between the ceramic resonators is obtained purely by electromagnetic coupling and not by circuit elements. A filter is proposed consisting of a plurality of isolated ceramic resonators coupled via externally connected circuit elements. Isolated ceramic resonators have a low impedance and require a relatively large capacitive loading for electronic tuning. When these resonators are configured in the proposed filter and are electronically tuned, the coupling between adjacent resonators becomes difficult to control, in that the coupling co-efficient varies over the tuning range and the losses introduced by the tuning capacitance degrades the effective resonator Q.

It is the object of the invention to utilize ceramic resonators in tunable filters and minimize the disadvantages regarding their use in such filters and to this end the invention comprises a filter for use in radio apparatus, the filter comprising a plurality of isolated ceramic resonators each having associated therewith and coupled to an input thereof a variable capacitance means for electronically tuning the associated ceramic resonator, wherein the inputs of adjacent ceramic resonators are coupled

led via a first coupling path and also via a second coupling path, the first coupling path comprising fixed capacitance means and the second coupling path comprising at least a cascade arrangement of the variable capacitance means associated with one of the adjacent resonators and the variable capacitance means associated with the other of the adjacent resonators, the relative values of the capacitances included in the first and second coupling paths being such that the overall coupling between the resonators remains substantially constant during the electronic tuning of the resonators by their associated variable capacitance means. Therefore the insertion loss of the filter will remain substantially constant and the performance of the filter will not be seriously degraded. Moreover ceramic resonators are relatively small and lend themselves to mass production. Furthermore the filter avoids the use of shields, and does not require an isolated board.

In a preferred embodiment of the invention the second coupling path comprises a coupling capacitance which is common to both the variable capacitance means associated with one of the adjacent resonators and the variable capacitance associated with the other of the adjacent resonators. This coupling capacitance will assist in the enhancing of the coupling at the low frequency end of the tuning range so as to provide constant coupling over the tuning range.

In a further preferred embodiment of the invention each variable capacitance means comprises in series a varicap diode network and an associated capacitance, wherein the coupling capacitance is coupled to the junction between the varicap diode network and the associated capacitance.

Embodiments of the invention will now be described in more detail, by way of non-limitative example with reference to the accompanying drawings.

Figure 1 is an electrical schematic diagram showing a filter in accordance with the invention. Figure 2a is a view of a ceramic resonator used in the embodiment shown in Figure 1.

Figure 2b is a cross-section of the ceramic resonator of Figure 2a.

Figure 1 depicts a narrow band electronically tunable filter 1 that is suitable for use in the front end of a UHF radio receiver. The filter 1 consists of a two pole filter section 2 and a three pole filter section coupled thereto via a RF amplifier 5. For the sake of simplicity the coupling between the two pole and three pole filter sections is not shown, however in this embodiment the output 6 of the two pole filter section is coupled to the RF amplifier 5 the output of which is coupled to the input 7 of the three pole filter 3, both lines 9 and 10 being short circuited to ground. The received RF signal is

supplied to the two pole filter section 2 via input 4 of the filter and the output signal of the filter is supplied on output 8 of the three pole filter section 3. Whilst this preferred embodiment is limited to a two pole filter section in combination with a three pole section, the invention is not limited to a filter having a specific number of poles. Other multi-pole filters in accordance with the invention are envisaged having a similar ladder network to the embodiment depicted by Figure 1.

The two pole and three pole filters sections 2,3 in figure 1 each have a number of ceramic resonators 11 each of which have a high dielectric constant of the order of 93, an unloaded Q of typically 400 and a low impedance of the order of 6 Ohms. A ceramic resonator 12 of the kind used in the filter 1 is depicted in Figures 2a and 2b. The ceramic resonator 12 is electrically equivalent to a quarter wavelength transmission line terminated in a short circuited end. The ceramic resonator 12 comprises a rectangular block 13 of high dielectric material having an aperture 14 passing longitudinally there-through, the dielectric block 13 is metalized on the outside of the block and on the inside of the aperture thereby creating the transmission line, the inner 15 and outer 16 metallization are joined at one end 17 thereby short circuiting the transmission line, the input 26 (Fig. 1) of the resonator being provided by a conductor 19 coupled to the inner metallization, the shorted end 27-1 (fig 1) is provided by a conductor 18 coupled to the outer metallization at the end 17.

In the embodiment depicted in Figure 1, ceramic resonators 11 are chosen to have a natural resonant frequency of typically 50MHz higher than the highest frequency in the desired tuning range. The input 26 of each ceramic resonator 11 is end loaded by means of the series combination of a varicap diode network 20 and an associated capacitance 21 extending between the input 26 and ground via lines 9 and 10, the shorted end 27-1 of the resonators being coupled to ground via lines 9 and 10. The total capacitance across each resonator 11, provided by the varicap diode network 20, its associated capacitance 21, the coupling capacitance 35 and other end loaded capacitances, are chosen whereby the natural frequency of the resonator 11 will be lowered to within the desired tuning range. The capacitance of the varicap diode networks 20 are varied by supplying an appropriate bias voltage on the DC supply input 23 whereby the resonators are able to be electronically tuned to a nominated frequency within the desired tuning range. The varicap diode networks 20 each comprise a group of four varicap diodes 24 arranged in opposed pairs of parallel connected varicap diodes. Such a configuration of varicap diodes 24 is preferable to using only one varicap diode since a reduc-

tion of intermodulation distortion is achieved without adding any extra loss. Coupled between the DC bias voltage input 23 and the varicap diode network 20 is a relatively high series resistance 25 and a bypass capacitance 27. The resistance 25 isolates the low impedance of the DC bias supply from loading the resonators, and the bypass capacitance 27 prevents any RF signals from being supplied to the DC bias supply. A relatively high resistance 28 is coupled across the associated capacitance 21 and provides a DC return for the bias current of the varicap diode network 20. The resistance 28 has a negligible shunting effect on the resonator and does not noticeably affect filter performance. The signal on the output of the two pole filter section 2 is fed via the RF amplifier 5 so that the SIN ratio of the signal does not significantly deteriorate beyond the amplifier. In other preferred embodiments the RF amplifier may be omitted. The filter is also provided with a input matching capacitance network 29, a output matching capacitance network 30 and RF amplifier matching capacitance network 31. Coupling between adjacent resonators occurs via a first coupling path 32 and a second coupling path 33. The first coupling path 32 comprises fixed capacitance 34 in the form of a T-network and the second coupling path 33 comprises the varicap diode networks 20 of their respective resonators 11 together with their associated series capacitances 21 and a coupling capacitance 35. The fixed capacitance 34 may in other embodiments be replaced by a single capacitance or another network capacitance. Similarly the coupling capacitance 35 may be replaced by a network capacitance.

In operation, the first coupling path 32 provides satisfactory coupling at the high frequency end of the tuning range which is not adequate for the low frequency end of the tuning range whereas the second coupling path 33 enhances coupling at the low frequency end. This arrangement maintains filter insertion loss essentially constant over the filter tuning range.

The relevant values of the coupling capacitances comprising the first coupling path 32 and second coupling path 33 are determined from the coupling co-efficient for the desired bandwidth, insertion loss and response. As the capacitance of the varicap diode networks 20 across each resonator will change with tuning, the value of the coupling co-efficient will vary over the band. This is controlled by the second coupling path 33 which incorporates the varicap diode networks 20 and coupling capacitance 35. The desired total coupling capacitance at each end of the tuning range is calculated and the difference between the desired capacitance at the low frequency end and the coupling capacitance due to the first coupling path at the low frequency end, is constructed from the

second coupling path. The total reactance from the coupling network forms part of the overall resonator loading. The filter input and output matching capacitance as well as the RF matching capacitance are also part of the overall summation and are chosen to be small as possible to maximise the available tuning range.

There may be a tendency for there to be a variation in insertion loss even though the coupling remains constant because of the losses introduced by the varicap diodes. This may be overcome by deliberately increasing the filter coupling co-efficient at the low frequency end. However, this increases bandwidth and the image rejection specifications may not be met. The actual filter coupling co-efficient can be chosen so as to minimize insertion loss with acceptable image rejection.

As will be apparent from the foregoing, various modifications and/or additions and/or subtractions to the above embodiments are possible without departing from the scope of the invention.

Claims

1. A filter for use in radio apparatus; the filter comprising a plurality of isolated ceramic resonators each having associated therewith and coupled to an input thereof a variable capacitance means for electronically tuning the associated ceramic resonator, wherein the inputs of adjacent ceramic resonators are coupled via a first coupling path and also via a second coupling path, the first coupling path comprising fixed capacitance means and the second coupling path comprising at least a cascade arrangement of the variable capacitance means associated with one of the adjacent resonators and the variable capacitance means associated with the other of the adjacent resonators, the relative values of the capacitances included in the first and second coupling paths being such that the overall coupling between the resonators remains substantially constant during the electronic tuning of the resonators by the associated variable capacitance means.

2. A filter as claimed in claim 1, wherein the second coupling path comprises a coupling capacitance which is common to both the variable capacitance means associated with one of the adjacent resonators and the variable capacitance associated with the other of the adjacent resonators.

3. A filter as claimed in claim 2, wherein each variable capacitance means comprises in series a varicap diode network and an associated capacitance, wherein the coupling capacitance is coupled to the junction between the varicap diode network and the associated capacitance.

4. A radio apparatus comprising a filter as claimed

in any one of the preceding claims.

5. A radio apparatus substantially as described with reference to the accompanying drawings.

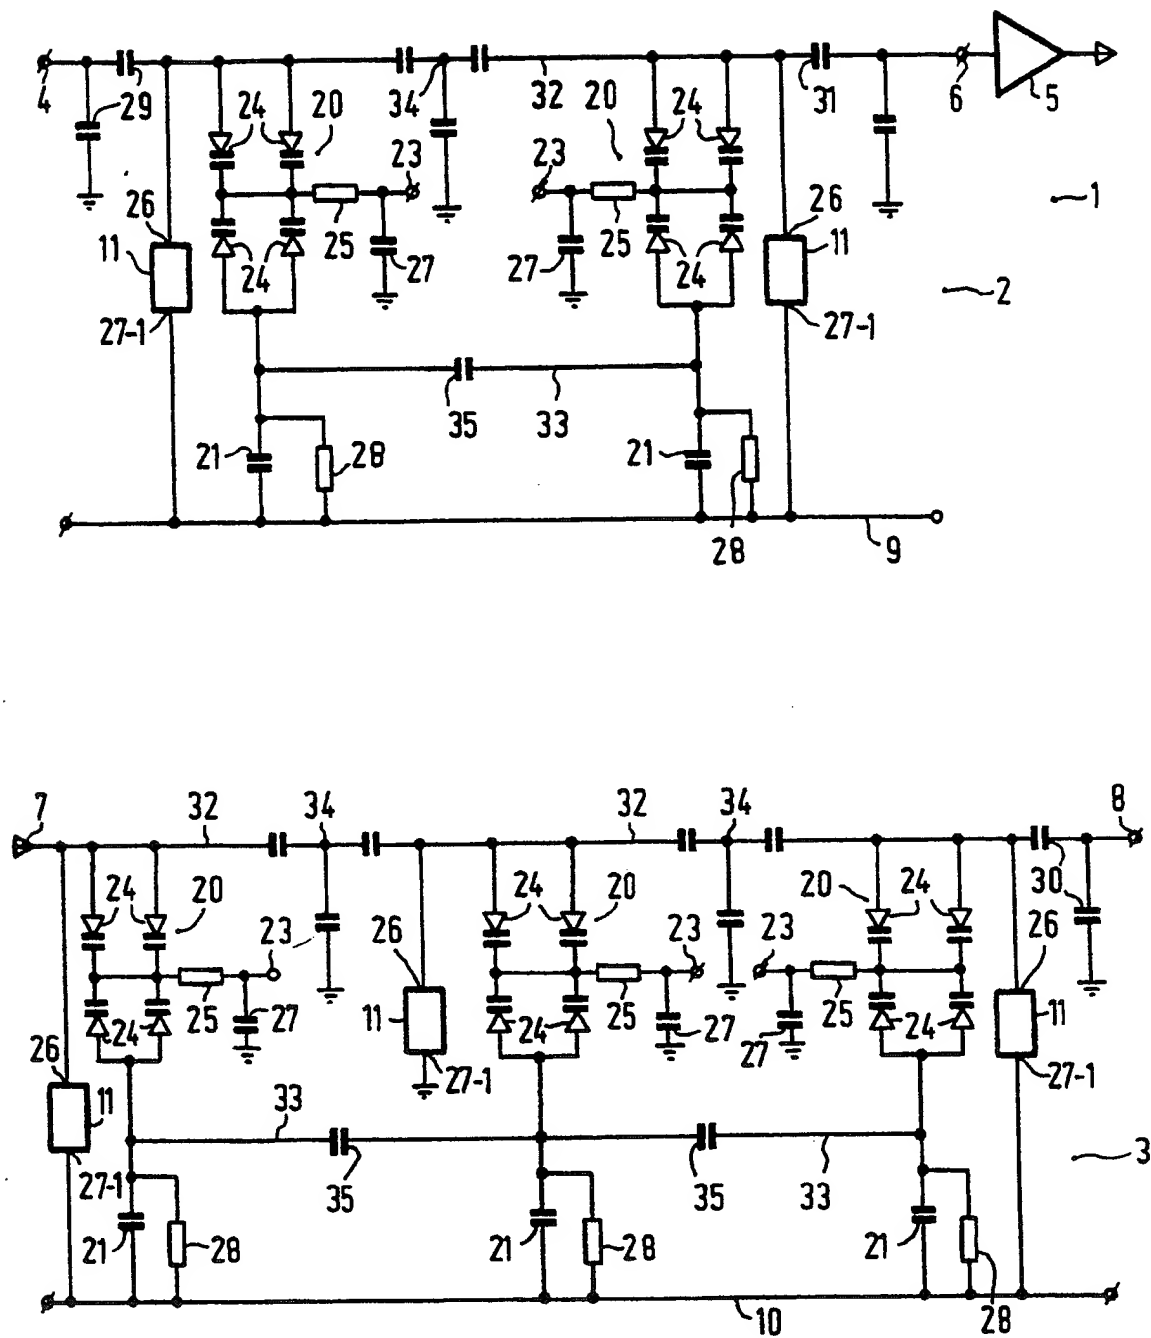


FIG. 1

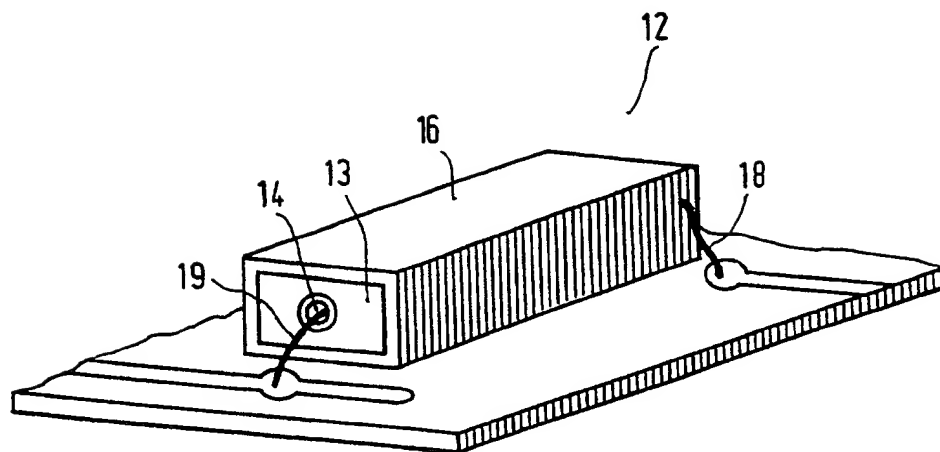


FIG. 2a

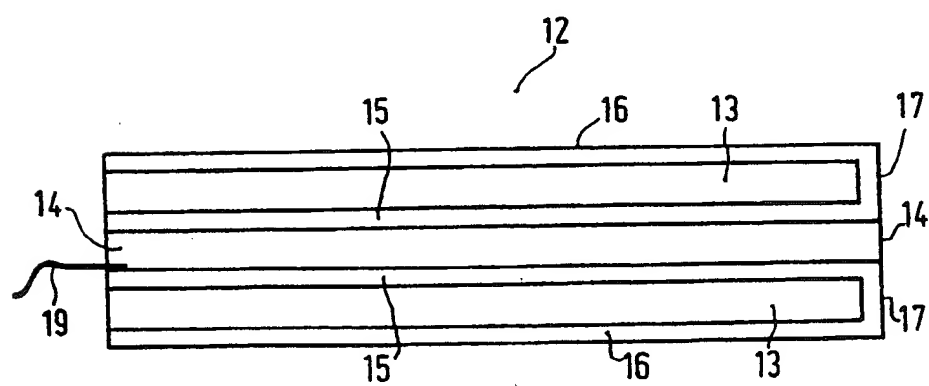


FIG. 2b

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 406 962 A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **90201752.4**

(51) Int. Cl.⁵: **H03H 9/54**

(22) Date of filing: **02.07.90**

(30) Priority: **07.07.89 AU 5119/89**

(43) Date of publication of application:
09.01.91 Bulletin 91/02

(84) Designated Contracting States:
DE FR GB IT SE

(88) Date of deferred publication of the search report:
17.04.91 Bulletin 91/16

(71) Applicant: **N.V. Philips' Gloeilampenfabrieken
Groenewoudseweg 1
NL-5621 BA Eindhoven(NL)**

(72) Inventor: **Hales, Jeff
c/o INT. OCTROOIBUREAU B.V., Prof.
Holstlaan 6
NL-5656 AA Eindhoven(NL)**

(74) Representative: **De Jongh, Cornelis
Dominicus et al
INTERNATIONAAL OCTROOIBUREAU B.V.
Prof. Holstlaan 6
NL-5656 AA Eindhoven(NL)**

(54) **A filter.**

(57) A filter (1) for use in radio apparatus, the filter comprising a plurality of isolated ceramic resonators (11) each having an input (26) and a plurality of variable capacitance means (24) for electronically tuning respective ceramic resonators and that the inputs of adjacent ceramic resonators are coupled via a first coupling path (32) and also via a second coupling path (33), the first coupling path being composed of a fixed capacitance network (34) and the second coupling path being composed of a cascade arrangement of a first said variable capacitance means and a second said variable capacitance means, the relative values of the capacitances forming the first and second coupling paths being such that the overall coupling between the resonators remains substantially constant during the electronic tuning of the resonators by the variable capacitance means.

EP 0 406 962 A3



European
Patent Office

EUROPEAN SEARCH REPORT

Application Number

EP 90 20 1752

DOCUMENTS CONSIDERED TO BE RELEVANT					
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)		
Y	EP-A-0 318 118 (PHILIPS)(31-05-1989) * Column 1, line 25 - column 3, line 43; column 3, line 52 - column 4, line 25 *	1,4,5	H 03 H 9/54 H 03 J 3/18		

A		3			
Y	ELECTRONIC ENGINEERING, vol. 33, no. 397, March 1961, pages 171-177, London, GB; R.C.V. MARCARIO et al.: "Design data for band-pass ladder filters employing ceramic resonators" * Page 171, left-hand column, lines 1-20; page 174, left-hand column, line 29 - right-hand column, line 4; table 3 *	1,4,5			

A	EP-A-0 165 158 (COMPAGNIE D'ELECTRONIQUE)(18-12-1985) * Abstract; page 2, lines 19-27; page 3, lines 17-20; figure 3 *	1			

			TECHNICAL FIELDS SEARCHED (Int. Cl.5)		
			H 03 H H 03 J		
The present search report has been drawn up for all claims					
Place of search The Hague		Date of completion of search 07 February 91	Examiner WRIGHT J.P.		
<table border="0"><tr><td>CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention</td><td>E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons ----- &: member of the same patent family, corresponding document</td></tr></table>				CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention	E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons ----- &: member of the same patent family, corresponding document
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention	E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons ----- &: member of the same patent family, corresponding document				